




EMH Series

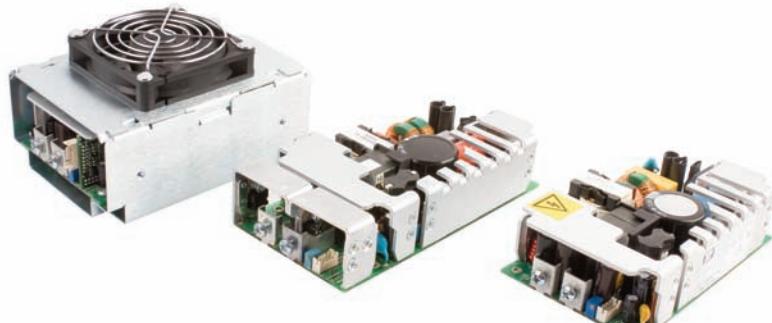

- 250 W & 350 W Forced-cooled
- Industry Standard 3" x 5" x 1.43" Format
- IT & Medical (BF) Approvals
- 80 V – 275 VAC Operation
- Optional ORing Diode (EMH350D Models)
- Analog & PMBus Signals Options (EMH350)
- 5 V Standby (EMH350)
- 3 Year Warranty

The EMH series of ultra compact high power density supplies deliver 250W and 350W within the industry standard 3" x 5" (76mm x 127mm) footprint. They achieve this very high power density with a minimal 12 CFM forced air requirement and a profile of just 1.4" (36 mm) making them suitable for 1U and a host of other applications.

All models feature a main output and 12V/0.6A fan supply output along with IEC60950 (IT) and IEC60601 BF (Medical) family safety approvals, thus including patient contact equipment in the wide range of possible applications.

The EMH350 has a 5V/2A standby rail and can be supplied with a range of optional analogue and digital, PMBus compatible signals as well as a variable speed fan & cover. The EMH350D models have built in Oring diodes for use in redundant applications.



T H E X P E R T S I N P O W E R

Models & Ratings

Output Voltage V1	Output Current V1	Fan Supply V3 ⁽¹⁾	Output Power	Model Number ⁽¹⁾
12 V	21.0 A	12 V/0.6 A	252 W	EMH250PS12
18 V	14.0 A	12 V/0.6 A	252 W	EMH250PS18
24 V	10.5 A	12 V/0.6 A	252 W	EMH250PS24
48 V	5.2 A	12 V/0.6 A	250 W	EMH250PS48

Output Voltage V1	Output Current V1	Standby Supply V2	Fan Supply V3 ⁽²⁾	Output Power	Model Number ⁽²⁾
12 V	29.2 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS12
18 V	19.5 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS18
24 V	14.6 A	5.0 V / 2.0 A	12 V/0.6 A	355 W	EMH350PS24
48 V	7.3 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS48

Output Voltage V1	Output Current V1	Standby Supply V2	Fan Supply V3	Output Power	Model Number ⁽³⁾
12 V	29.2 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS12D
18 V	19.5 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS18D
24 V	14.6 A	5.0 V / 2.0 A	12 V/0.6 A	355 W	EMH350PS24D
48 V	7.3 A	5.0 V / 2.0 A	12 V/0.6 A	354 W	EMH350PS48D

Notes:


- The EMH250 is available with a top mounted fan cover option. Add suffix '-TF' to model number e.g. EMH250PS12-TF. See mechanical drawing later in this datasheet. The fan supply V3 is no longer available with this option as it is used to drive the fan.
- The EMH350 is available with various analog, digital signal and cover options. See availability table and mechanical drawing later in this datasheet. The fan supply V3 is no longer available with cover options as it is used to drive the fan.
- The EMH350D models are fitted with an integral ORing diode and are also available with various analog and digital signal options. See availability table and mechanical drawing later in this datasheet.

Input Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage - Operating	80	115/230	275	VAC	Derate output power < 90 VAC. See fig. 1
Input Frequency	47	50/60	63	Hz	
Power Factor		>0.9			EN61000-3-2 class A compliant
Input Current - No Load		0.05/0.03		A	115/230 VAC
Input Current - Full Load		2.6/1.3 3.7/1.8		A	115/230 VAC - EMH250 115/230 VAC - EMH350
Inrush Current			60	A	230 VAC cold start, 25 °C
No Load Input Power		5.8 6.4 1.0		W	EMH250 EMH350 EMH350 with output inhibit (via signal option)
Earth Leakage Current		90/160	250	µA	115/230 VAC/50 Hz (Typ.), 264 VAC/60 Hz (Max.)
Input Protection	F10 A/250 V internal fuse in both lines				

Derating Curve - All EMH250 & EMH350 models

Figure 1

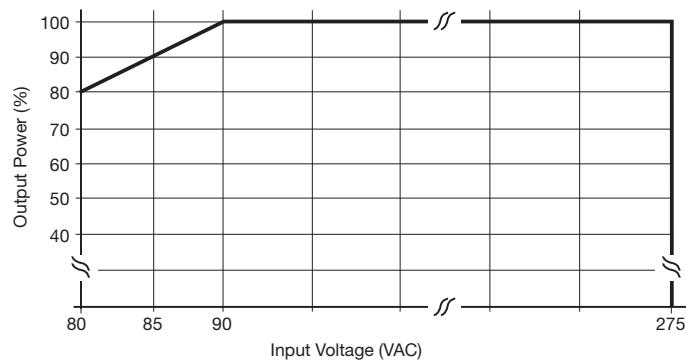

Output Characteristics

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage - V1	12		48	VDC	See Models and Ratings table
Initial Set Accuracy			± 1 V1, ± 5 V2	%	50% load, 115/230 VAC, V2 EMH350 only
Output Voltage Adjustment	± 10 V1			%	Via potentiometer & PMBus control
Minimum Load	0			A	
Start Up Delay		1		s	230 VAC full load (see fig.2, 3 & 4)
Hold Up Time		16		ms	115 VAC full load (see fig.5)
Drift			± 0.2	%	After 20 min warm up
Line Regulation			± 0.5	%	90-264 VAC
Load Regulation			± 1 V1, ± 5 V2	%	0-100% load, V2 EMH350 only
Transient Response - V1			4	%	Recovery within 1% in less than 500 μ s for a 50-75% and 75-50% load step
Over/Uncertain - V1		2		%	
Ripple & Noise			1	% pk-pk	20 MHz bandwidth (see fig.6 & 7)
Overshoot Protection	115		140	%	Vnom DC.
Overload Protection	110		150	% I nom	Auto reset, knee point adjustable via PMBus control (see fig.8) EMH350-50 only
Short Circuit Protection					Fitted
Temperature Coefficient			0.05	%/ $^{\circ}$ C	
Overtemperature Protection				$^{\circ}$ C	Fitted, auto recovery
Patient Leakage Current			100	μ A	264 VAC/60 Hz

Start up delay from AC turn on

Figure 2
V1 Start up example
(115 VAC, 686 ms)


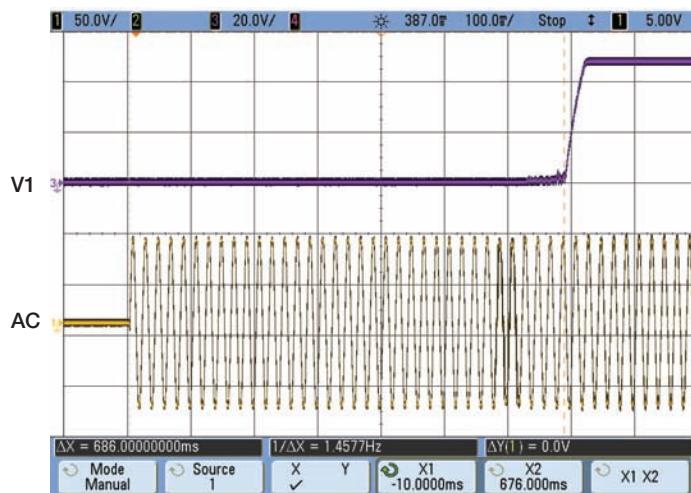



Figure 3
V3 Fan supply example
(115 VAC, 530 ms)

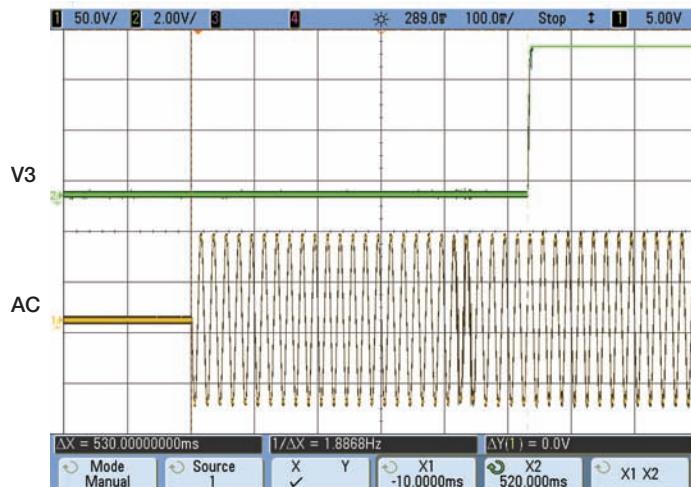

Output Characteristics


Figure 4
V2 Standby Supply example
(115 VAC, 75 ms)

EMH350 only

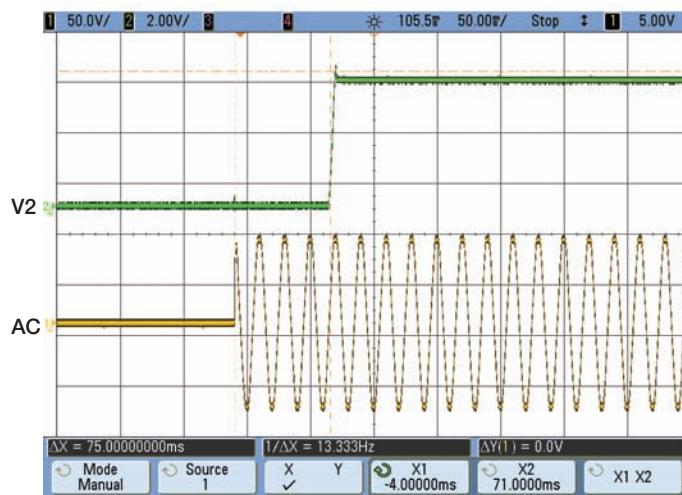


Hold up time from loss of AC

Figure 5
V1 Hold up time example
(115 VAC, 22 ms)

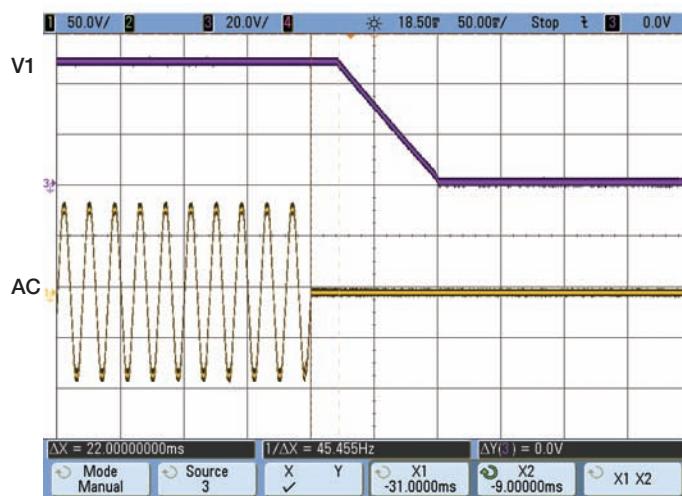


Output Ripple & Noise

Figure 6
EMH350PS12, 350 W, (87 mV
pk-pk ripple, 20 MHz bandwidth)

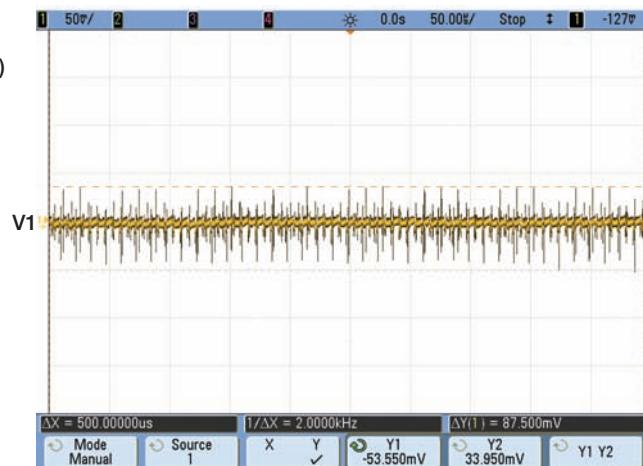


Output Characteristics

Figure 7
EMH350PS24 350 W (85 mV
pk-pk ripple, 20 MHz bandwidth)

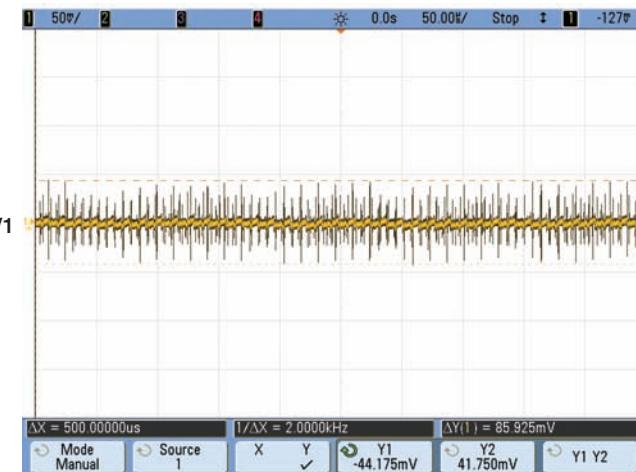

Overload Characteristics

Figure 8
Typical Overload Characteristics
(EMH350PS12 shown)

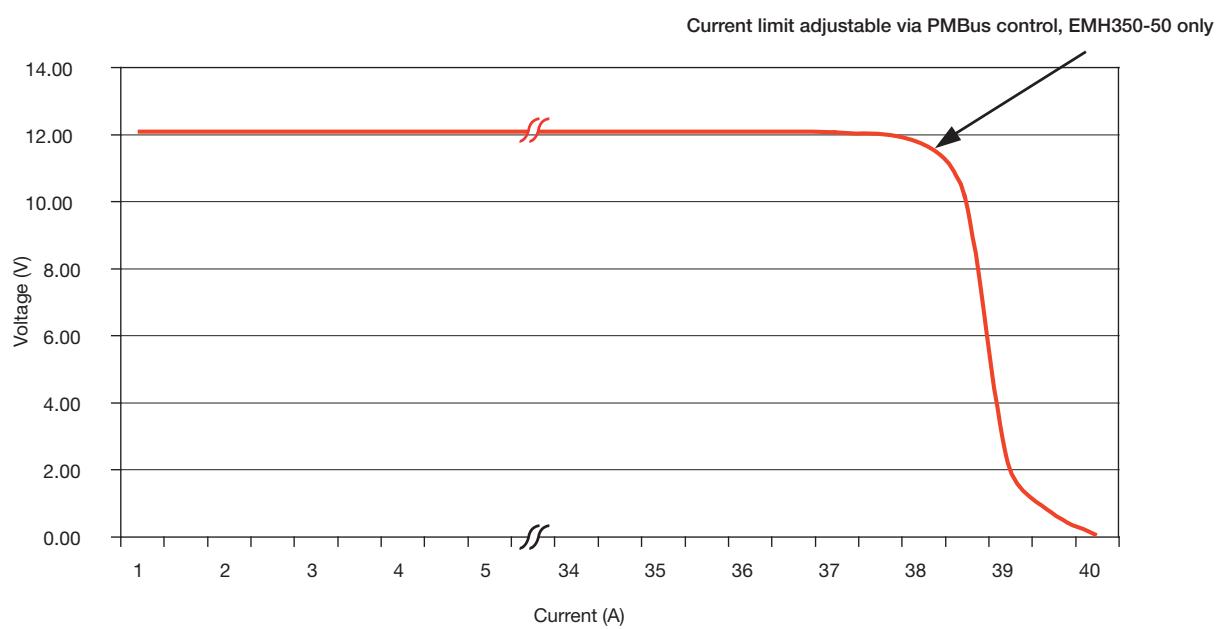

General Specifications

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		87		%	Full load (see fig.9 & 10)
Isolation: Input to Output Input to Ground Output to Ground	4000			VAC	
	1500			VAC	
	1500			VAC	
Switching Frequency		62-560 / 71 / 50-130		kHz	PFC / Main Converter / Standby Converter
Power Density			16.3	W/in ³	
Mean Time Between Failure		400		kHrs	MIL-HDBK-217F, Notice 2 +25 °C GB
Weight		0.9 (410) 1.0 (450)		lbs (g)	EMH250 & EMH350, EMH350D

Efficiency Versus Load

Figure 9
EMH350PS12


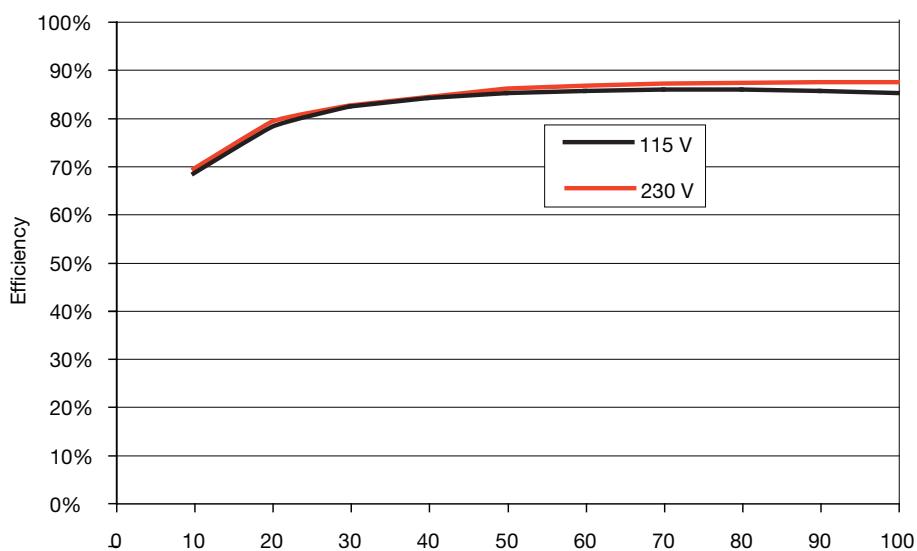


Figure 10
EMH350PS48

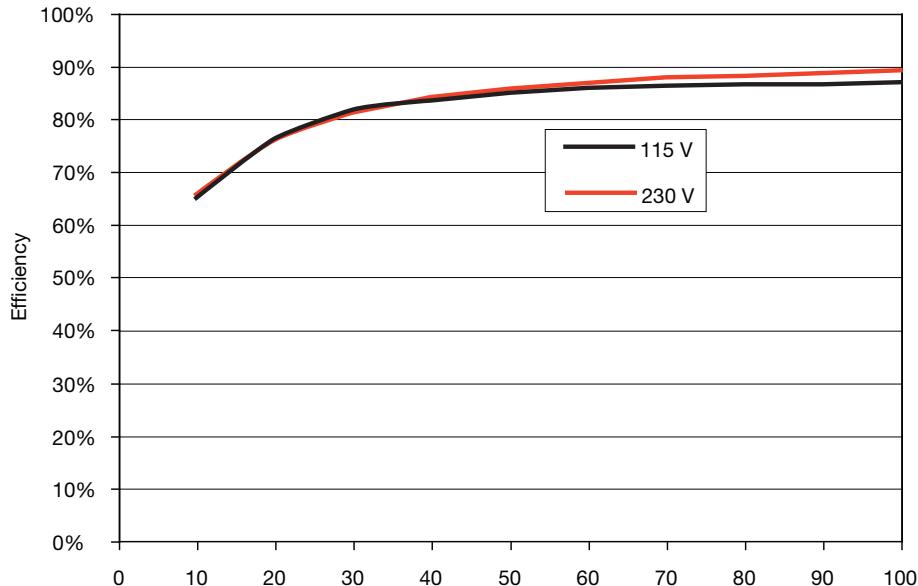

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	0		+70	°C	Derate linearly from +50 °C at 2.5%/°C to 50% at 70 °C. (See Thermal Considerations)
Storage Temperature	-40		+85	°C	
Cooling	12			CFM	Forced-cooled, see Thermal Considerations & Mechanical details
Humidity	5		95	%RH	Non-condensing
Operating Altitude			3000	m	
Shock					3 x 30 g/11 ms shocks in both +ve & -ve directions along the 3 orthogonal axis, total 18 shocks.
Vibration					Three axis 5-500 Hz at 2 g x 10 sweeps

Electromagnetic Compatibility - Emissions

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Conducted	EN55011/22	Class B		
Radiated	EN55011/22	Class A		
Voltage Fluctuations	EN61000-3-3			

Electromagnetic Compatibility - Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
Low Voltage PSU EMC	EN61204-3	High severity level	as below	
Harmonic Current	EN61000-3-2	Class A		
Radiated	EN61000-4-3	3	A	
EFT	EN61000-4-4	3	A	
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	
Dips and Interruptions	EN61000-4-11	Dip: 30% 10 ms	A	
		Dip: 60% 100 ms	B	
		Dip: 100% 5000 ms	B	
		Dip: 30% 500 ms	A	
	EN60601-1-2 (EN61000-4-11)	Dip: 60% 100 ms	A	Requires load derating to approx 50% with 100 VAC input.
		Dip: 100% 10 ms	A	
		Int.: >95% 5000 ms	B	

Safety Agency Approvals

Safety Agency	Safety Standard	Category
CB Report	UL Cert #US/TBA/UL, IEC60950-1:2005 Ed 2	Information Technology - Pending
UL	UL File # E139109-AXX-UL, UL60950-1 (2007), CSA 22.2 No.60950-1-07 Ed 2	Information Technology - Pending
TUV	TUV Certificate # TBA, EN60950-1:2006	Information Technology - Pending
CE	LVD	

Safety Agency	Safety Standard	Category
CB Report	UL Certificate # US/TBA/UL, IEC60601-1 Ed 2	Medical - Pending
UL	UL Report # E146893-AXX-UL-1, UL60601-1, CSA C22.2 No.601.1-M90:2005	Medical - Pending
TUV	TUV Certificate # TBA, EN60601-1/A12:1995	Medical - Pending


Equipment Protection Class	Safety Standard	Notes & Conditions
Class I & BF	IEC60950-1:2005 Ed 2 & IEC60601-1 Ed 2	See safety agency conditions of acceptability for details

Signals


Model	Signal Functions Available								Optional Cover Availability	
	Remote Sense	Fan Supply	5 V Standby	AC OK/Power Fail	Inhibit V1 & V Fan	Current Share	Variable Speed Fan Control	PMBus	Standard Top Fan (-TF)	Variable Speed Top Fan (-VF)
EMH250PSXX	✓	✓							✓	
EMH350PSXX	✓	✓	✓						✓	
EMH350PSXX-01	✓	✓	✓	✓	✓	✓			✓	
EMH350PSXX-02	✓	✓	✓	✓	✓	✓	✓			✓
EMH350PSXX-50	✓	✓	✓					✓	✓	
EMH350PSXXD	✓	✓	✓							
EMH350PSXXD-01	✓	✓	✓	✓	✓	✓				
EMH350PSXXD-50	✓	✓	✓					✓		

Characteristic	Notes & Conditions
Signals & Control	
Remote Sense	Compensates for 0.5 V total voltage drop
12 V Fan Supply (V3)	12 V/0.6 A supply, present when AC supplied, inhibit turns fan supply off.
5V Standby (V2)	5 V/2 A supply, always present when AC supplied
AC OK/Power Fail	AC OK is an open collector transistor, referenced to negative sense, providing a minimum of 3 ms warning of loss of output regulation. The transistor is normally off when AC is healthy. See fig 11
Inhibit	The inhibit high pin should be pulled below 0.4 V to switch V1 & V Fan (V3) off. Open circuit or 2-8 V maximum to switch the output on. See fig 12
Current Share	Connecting pin 9 (-01 & -02 models) of like voltage units (3 maximum) will force the current to share between the outputs. Units share current within 10% of each other at full load. See fig 13
Variable Speed Fan Control	When used in conjunction with -VF fan cover, varies the speed of the internal fan depending on temperature of the unit.
I ² C/PMBus	The I ² C PMBus compatible interface can be used for monitoring the unit output voltage, current, internal temperature, external 3 wire TACHO fan and run time. Adjustment of the output voltage and current limit set point and identification of the unit model number and serial number are also possible. Consult sales for further information and application notes.

AC OK Power Fail



Inhibit

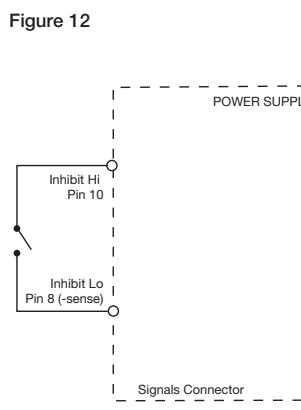

**Parallel & Current Share
(EMH350 recommended connection)**

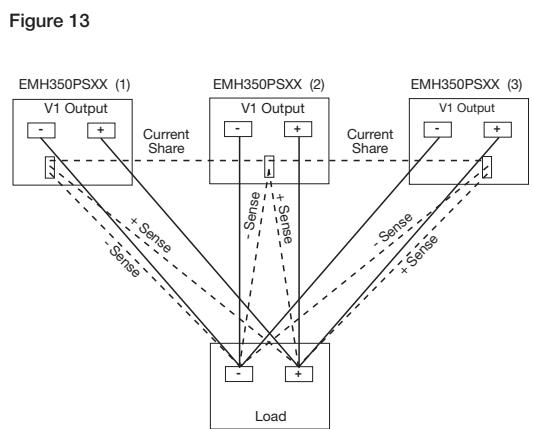


Figure 11


Figure 12

Figure 13

Signals


Redundancy N+1
(EMH350 recommended connection)

Figure 14

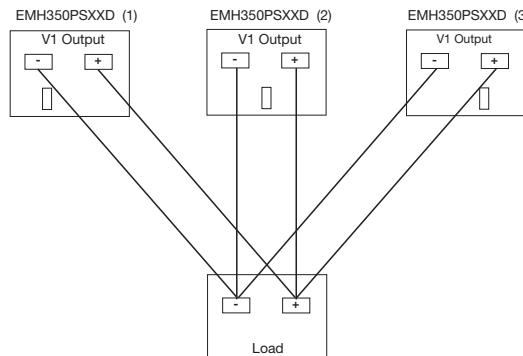

Mechanical Details

EMH250

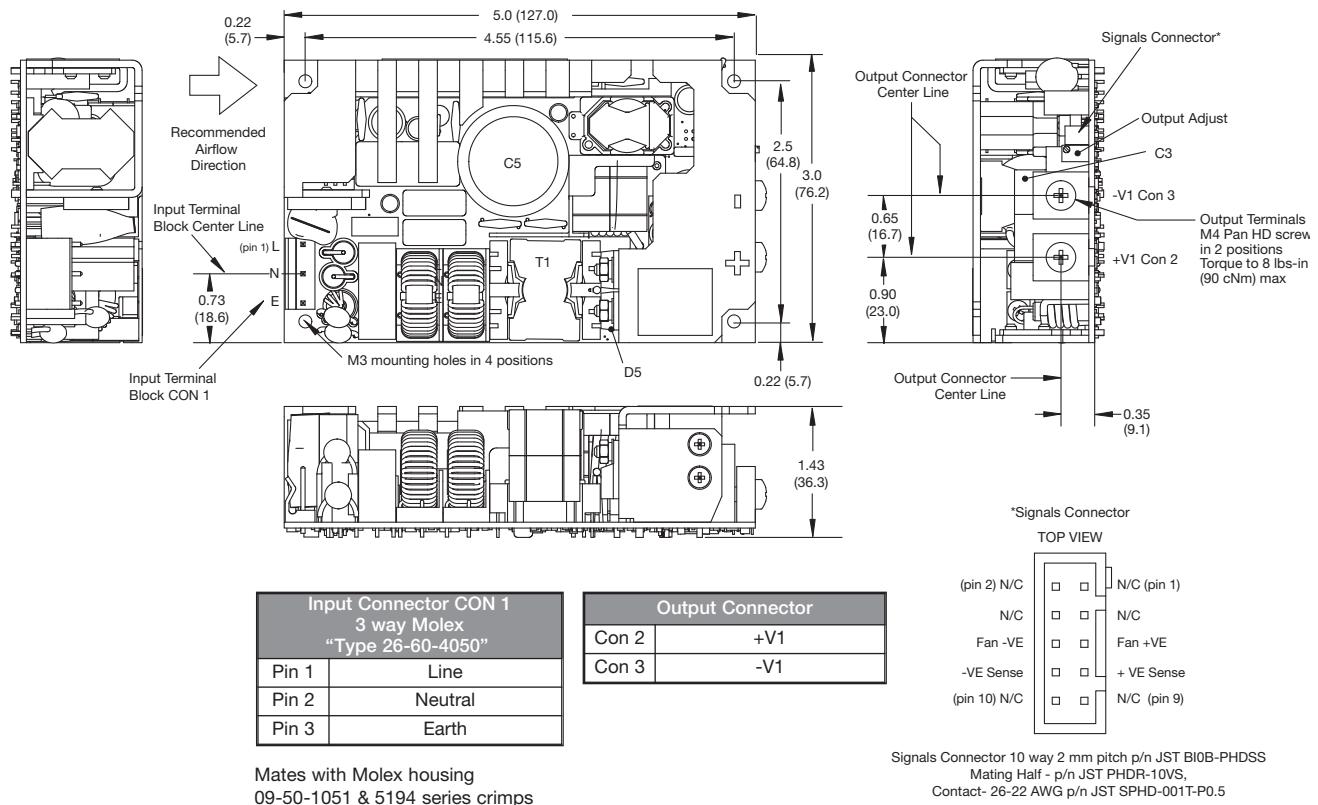


Notes

1. Dimensions shown in inches (mm).
Tolerance: ± 0.02 (± 0.5)


2. Weight: 0.90 lb (410 g).

Mechanical Details

EMH350

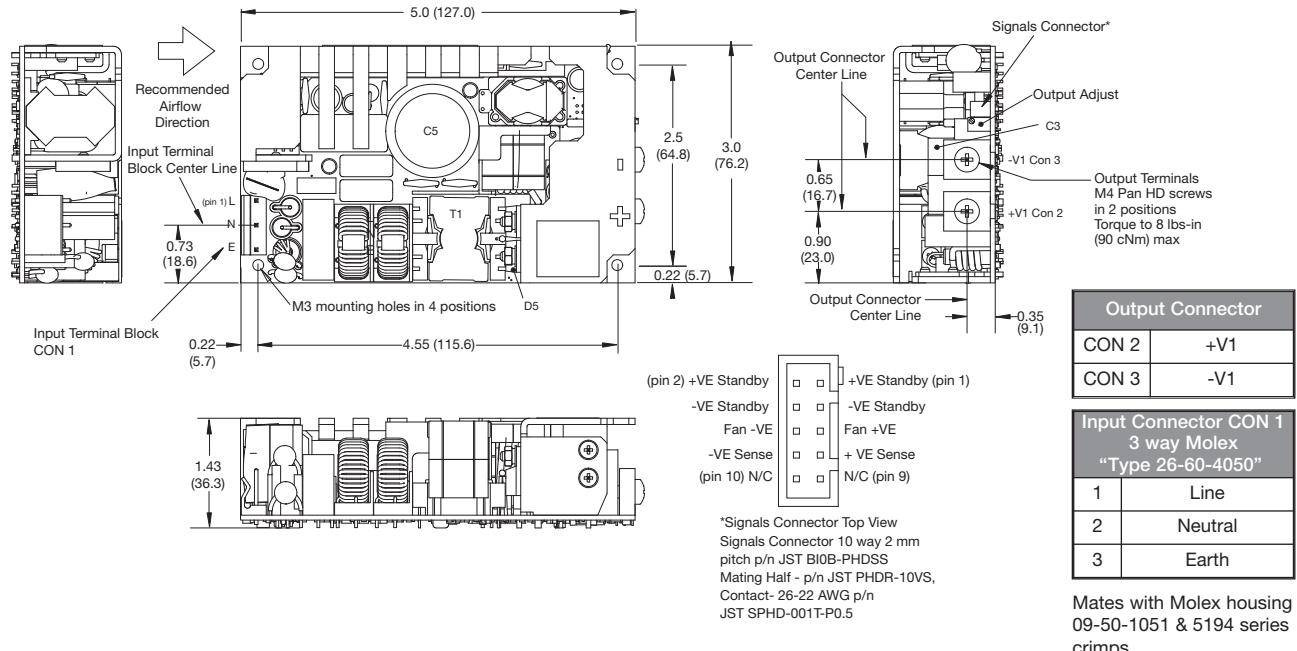

EMH350 (Signal Options)

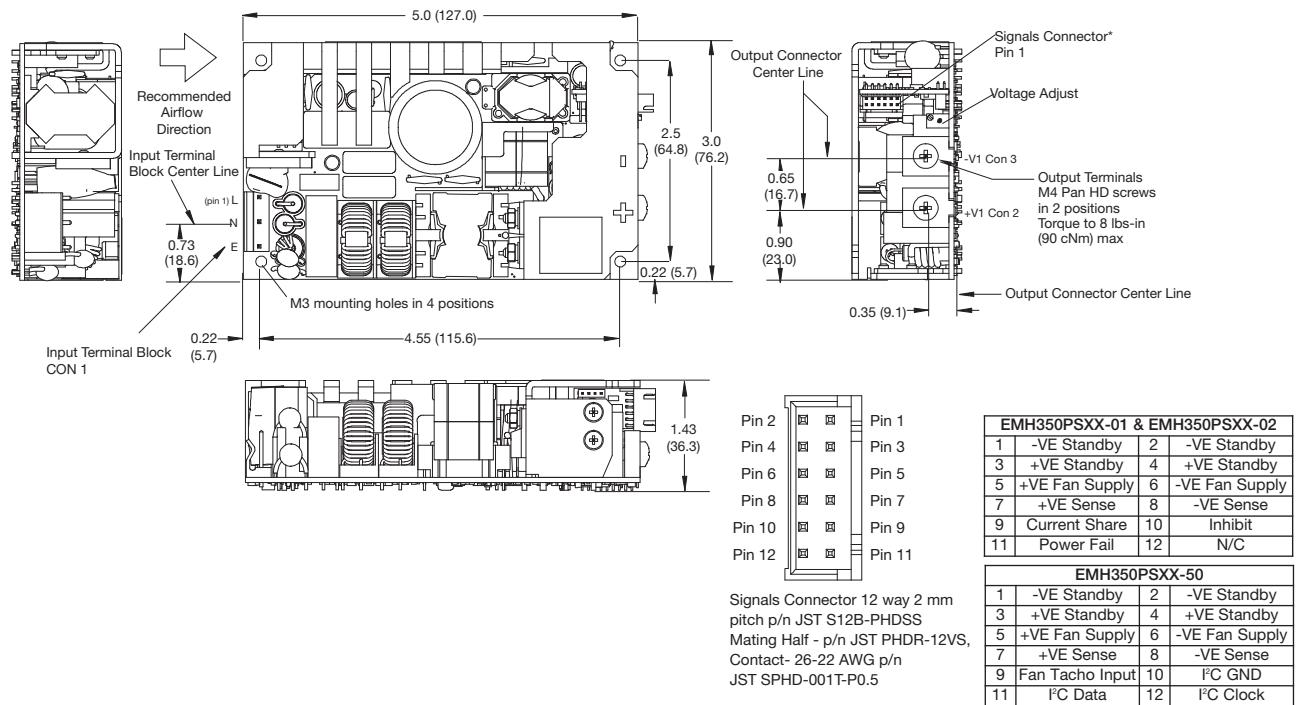


Notes

1. Dimensions shown in inches (mm). Tolerance: ± 0.02 (± 0.5)

2. Weight: 0.9 lb (410 g).


Mechanical Details

EMH350D

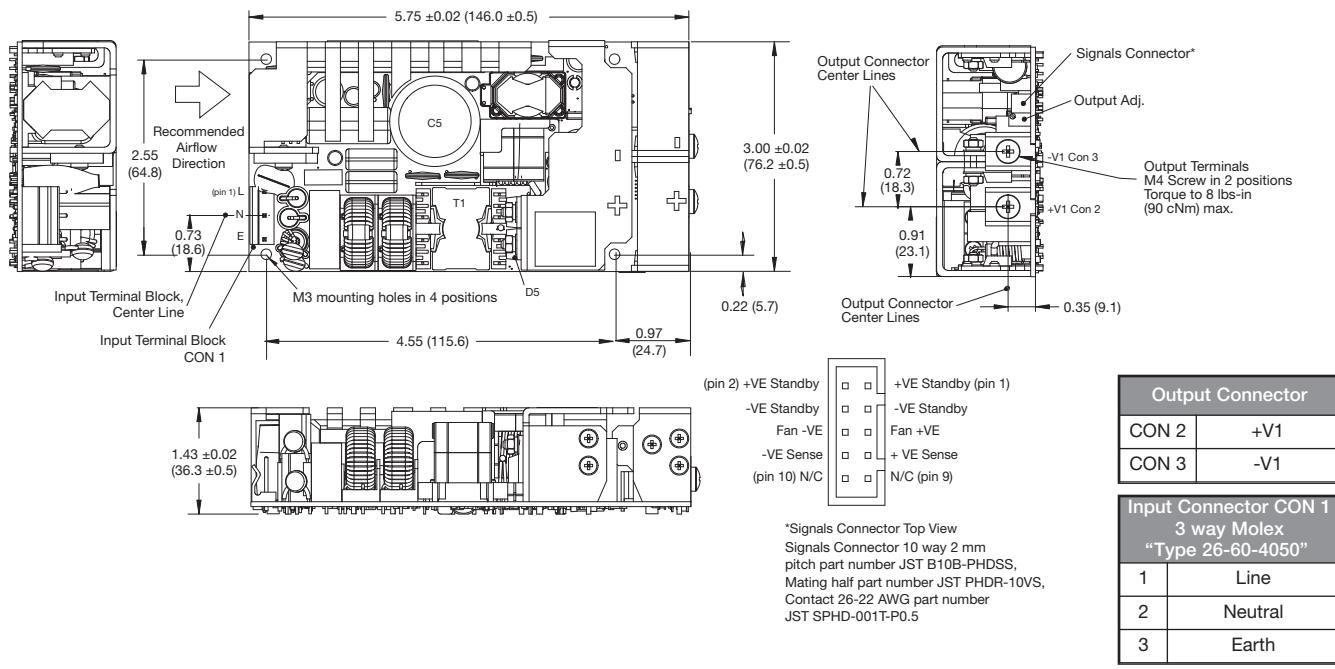

Mates with Molex housing 09-50-1051 & 5194 series crimps

EMH350D (Signal Options)

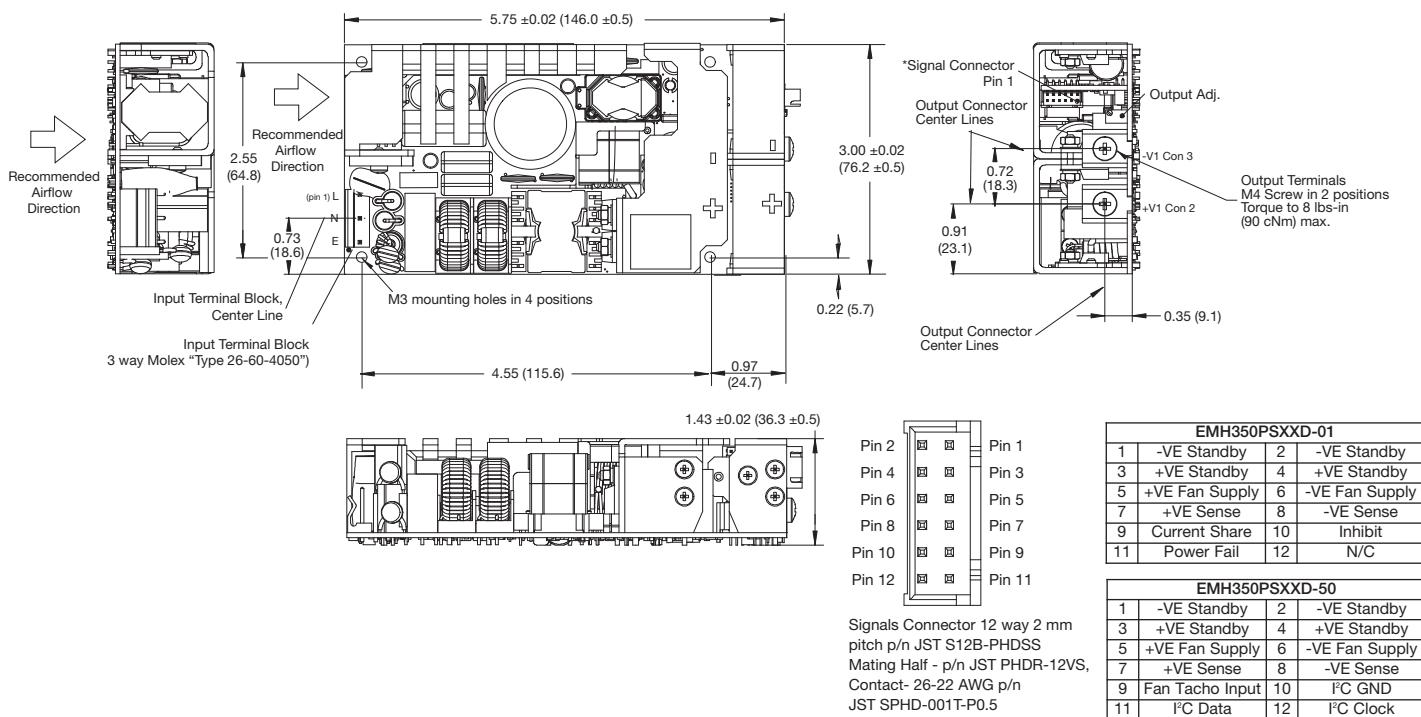


Notes

1. Dimensions shown in inches (mm). Tolerance: ± 0.02 (± 0.5)


2. Weight: 1.0 lbs (450 g).

Mechanical Details

Top Fan - EMH250-TF & EMH350-TF

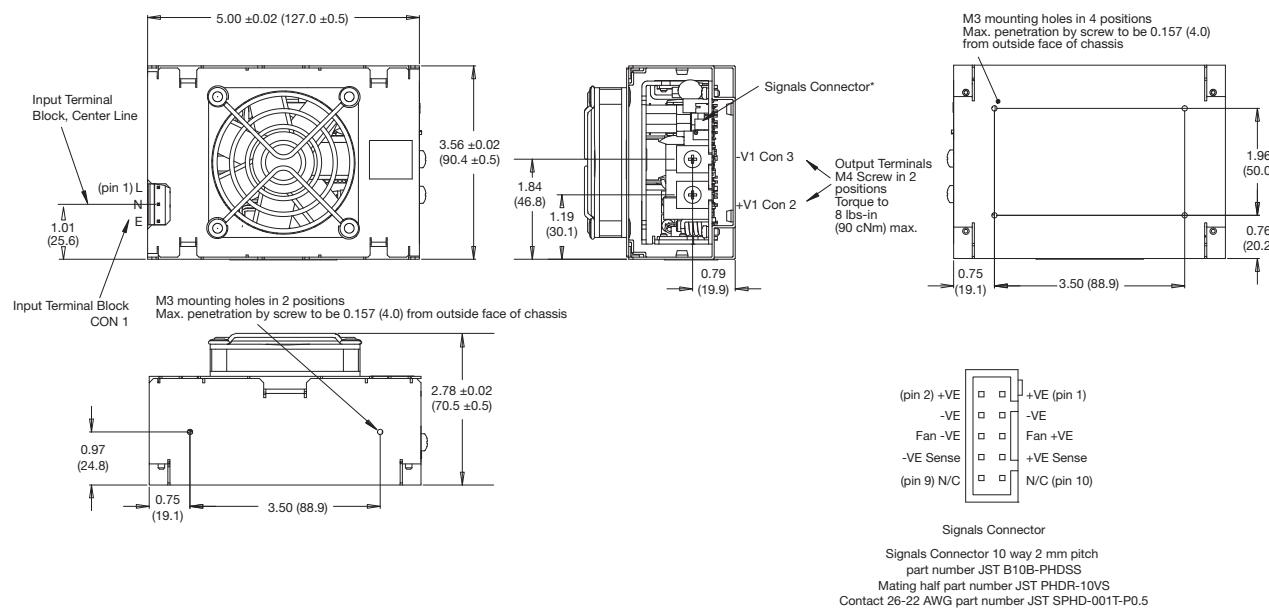

Top Fan with Signals Options - EMH350-01TF, EMH350-50TF & EMH350-02VF

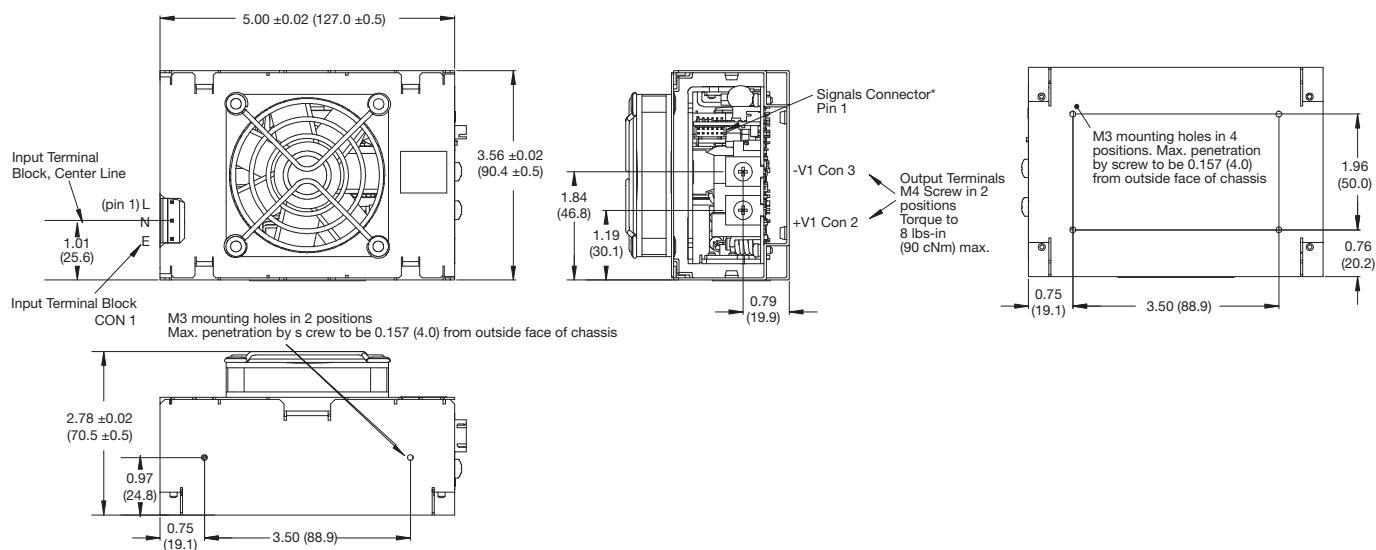

Notes

- Dimensions shown in inches (mm). Tolerance: ±0.02 (±0.5)
- Weight: 1.67 lbs (760 g).

Thermal Considerations

In order to ensure safe operation of the PSU in the end-use equipment, the temperature of the components listed in the table below must not be exceeded. Temperature should be monitored using K type thermocouples placed on the hottest part of the component (out of any direct air flow). See mechanical drawings for component locations.

The service life of the power supply is largely determined by the temperature of the electrolytic capacitors during normal operation and therefore to achieve the optimum lifetime, it is recommended to reduce the temperatures shown by approximately 30°C.

Temperature Measurements (Ambient ≤ 50 °C)	
Component	Max Temperature ° C
D5 case	110 °C
C5	105 °C
C3	105 °C
T1 coil	120 °C



www.xppower.com

North American HQ

XP Power
990 Benecia Avenue, Sunnyvale, CA 94085
Phone : +1 (408) 732-7777
Fax : +1 (408) 732-2002
Email : nasales@xppower.com

European HQ

XP Power
Horseshoe Park, Pangbourne, Berkshire, RG8 7JW
Phone : +44 (0)118 984 5515
Fax : +44 (0)118 984 3423
Email : eusales@xppower.com

German HQ

XP Power
Auf der Höhe 2, D-28357 Bremen, Germany
Phone : +49 (0)421 63 93 3 0
Fax : +49 (0)421 63 93 3 10
Email : desales@xppower.com

Asian HQ

XP Power
401 Commonwealth Drive, Haw Par Technocentre,
Lobby B #02-02, Singapore 149598
Phone : +65 6411 6900
Fax : +65 6741 8730
Email : apsales@xppower.com
Web : [www.xppowerchina.com /](http://www.xppowerchina.com/)
www.xppower.com

North American Sales Offices

Toll Free.....+1 (800) 253-0490
Central Region.....+1 (972) 578-1530
Eastern Region+1 (973) 658-8001
Western Region.....+1 (408) 732-7777

European Sales Offices

Austria+41 (0)56 448 90 80
Belgium+33 (0)1 45 12 31 15
Denmark.....+45 43 42 38 33
Finland.....+46 (0)8 555 367 01
France+33 (0)1 45 12 31 15
Germany.....+49 (0)421 63 93 3 0
Italy.....+39 039 2876027
Netherlands+49 (0)421 63 93 3 0
Norway.....+47 63 94 60 18
Sweden+46 (0)8 555 367 00
Switzerland.....+41 (0)56 448 90 80
United Kingdom....+44 (0)118 984 5515

Asian Sales Offices

Shanghai+86 21 51388389
Singapore+65 6411 6902

Distributors

Australia.....	+61 2 9809 5022	Amtex
Balkans	+386 1 583 7930	Elbacomp
Czech Rep.	+420 235 366 129	Vums Powerprag
Czech Rep.	+420 539 050 630	Koala Elektronik
Estonia.....	+372 6228866	Elgerta
Greece	+30 210 240 1961	ADEM Electronics
Hungary.....	+36 1 705 2345	JAMSoft
India	+91 80 4095 9330/31/32	Digiprotech
Israel.....	+972 9 7498777	Appletec
Israel	+972 (0)73 7001212	Cidev
Japan	+81 48 864 7733	Bellnix
Korea.....	+82 31 422 8882	Hanpower
Latvia.....	+371 67501005	Caro
Lithuania.....	+370 5 2652683	Elgerta
Poland	+48 22 8627500	Gamma
Portugal.....	+34 93 263 33 54	Venco
Romania.....	+4 0348 730 920	Multichron T.L.
Russia	+7 (495)234 0636	Prosoft
Russia	+7 (812)325 5115	Gamma
South Africa.....	+27 11 453 1910	Vepac
Spain.....	+34 93 263 33 54	Venco
Taiwan.....	+886 3 3559642	Fullerton Power
Turkey	+90 212 465 7199	EMPA

Global Catalog Distributors

Americas.....	Newark	newark.com
Europe	Farnell	farnell.com
Asia	element14	element14.com



T H E X P E R T S I N P O W E R