



NAVPIXEL™ NPD1555

15" IP65 Sunlight Readable Marine Display

NAVPIXEL™ NPD1555, the high-performance, rugged touch monitor, is specially engineered to survive from the most demanding working environment. Housed in a milled billet aluminum case, the slim-profile NAVPIXEL™ NPD1555 is light weight and watertight with fully sealed IP65 connectors. The front-mounted sunlight readable touchscreen makes the industrial rugged monitor vividly and user-friendly. In addition, the high power efficiency and low heat design guarantee the stability and longevity required for mission critical deployment.

Main Features

- 1000 Nits Sunlight Readable LCD
- Long Life, Low Power Consumption LED Backlight
- -10°C~50°C Wide Operation Temperature
- Advanced Optical Bonding (AOT)
- Resistive Touch Support
- IP65 Waterproof
- 8~36V DC input

Application:

- Marine

*Specifications are subject to change without notice.
All brands or product names are trademarks or registered trademarks of their respective companies.*

Specifications

LCD Display

Backlight

- 15" LED Backlight

Active Display Area

- 304.128x228.096 mm

Brightness

- 1000 cd/m²

Resolution

- 1024x768 (XGA)

Contrast Ratio

- 700:1

Pixel Pitch (mm)

- 0.297(H)x0.297(V)

Viewing Angle

- 160°(H), 160°(V)

Display Color

- 16.2M

Response Time

- Tr 8ms/ Tf 17ms

Inputs

- VGa1, DV1x1, Composite x3, RS232x1

Mechanical

IP Rating

- Fascial waterproof to IP65 standards when console mounted.

Construction

- Rugged Aluminum Alloy Chassis

Mounting

- Panel (Flush) mount, VESA mount

Dimension

- 352.8mm (W) x 303.3mm(H) x 56mm(D)

Net Weight

- To be advised

Power

Voltage

- Operates on 12V and 24V systems

Power Consumption

- 30~35W

Environmental

Operating Temperature

- -10°C~50°C (14°F~122°F)

Non-Operating Temperature


- -20°C~70°C (-4°F~158°F)

Certification


- Designed to meet FCC Class A, DNV Marine Approval Pending

Outline Dimensions


Unit: mm

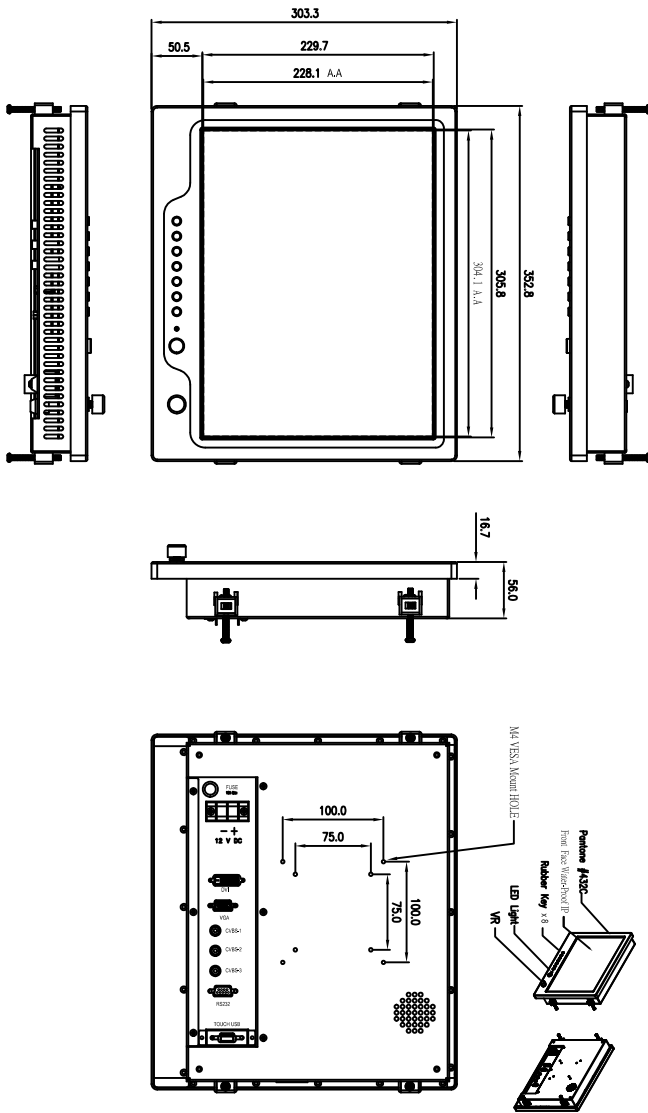

Control Button

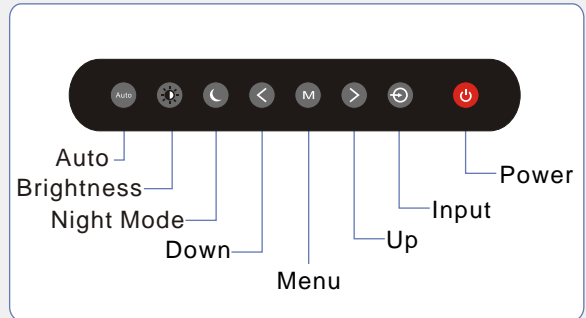

Connectors

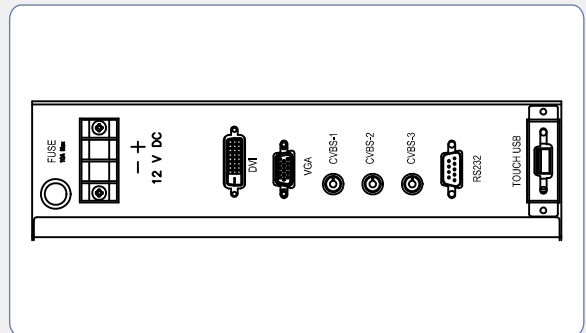

Ordering Information

NPD1555-ETAW-G01

Optional Accessories

840612111200 Power Adapter 12V, 10A, 120W, PAC120F

810618301010 Power cord (US type)

810618301090 Power cord (European type)