


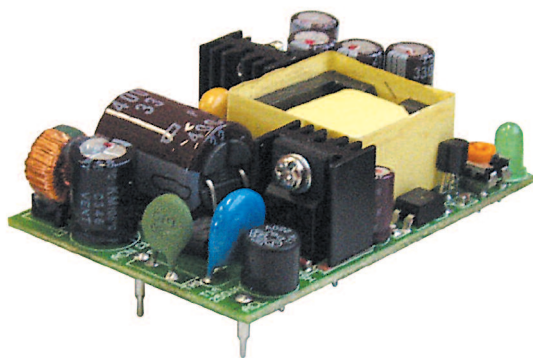

KPS Series

5 to 15W AC-DC Board Mount Power Supplies

- Small Size & Lightweight
- PCB Board Mountable
- Low Cost
- Universal Input Voltage
- RoHS Compliant

Key Market Segments & Applications

Factory Automation
Telecom
Datacom
Printers and motor drives
Instruments

KPS Features and Benefits

Features

- Small Size
- Wide Input Range
- No External Components Needed

Benefits

- Minimises PCB Space
- Global use with no manual intervention
- Easy To Use

Specifications

MODEL		KPS-5	KPS-10	KPS-15
ITEMS				
Input Voltage range		85 - 264VAC (47 - 440Hz) or 110 - 370VDC		
Inrush Current (115 / 230VAC)	A		20 / 40	
Input Current (115/230VAC)	A	0.13 / 0.07	0.27 / 0.13	0.4 / 0.2
Temperature Coefficient			±0.05%/°C	
Voltage Accuracy			±1%	
Minimum Load	A		None	
Load Regulation			±1% (10% to 100% load)	
Line Regulation (1)			±0.5%	
Ripple & Noise (2)	mV		1% or 50mV whichever is greater	
Short Circuit Protection	-		Continuous - hiccup mode	
Overvoltage Protection	V		130-150%	
Hold Up Time (Typ@115VAC)	ms	8	16	16
LED Indicator			Green LED = OK	
Operating Temperature			0 to +70°C with derating	
Storage Temperature			-20 to +85°C	
Humidity (non condensing)			10 - 95% RH	
Cooling			Convection	
Withstand Voltage			Input to Output 3kVAC	
Vibration (non operating)		23.52m/s ² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)		
Shock		< 196.1 m/s ² (20G)		
Safety Agency Approvals	-	UL60950, CSA60950, EN60950-1 Class II, CE Mark		
Conducted & Radiated EMI		EN55022-B, FCC Class B		
Immunity		EN61000-4 -2, -3, -4, -5, -6		
Weight (Typ)	g	29g	60g	80g
Size (WxLxH; H above pcb)	mm	55 X 35 X 20	64 X 45 X 23	70 X 48 X 23
Warranty		One Year		

Notes:

(1) KPS-5 Measured from 100 - 240VAC


(2) Measured with 0.1uF ceramic & 10uF electrolytic at 20MHz BW

Models

Model	Output Voltage (V)	Maximum Output (A)	Peak Load ⁽³⁾ (A)	Output Pwr (W)	Eff (typ)%
KPS5-3R3	3.3	1.25	-	4.1	70
KPS5-5	5.0	1.00	-	5.0	70
KPS5-12	12.0	0.42	-	5.0	70
KPS5-15	15.0	0.33	-	5.0	70
KPS5-24	24.0	0.23	-	5.5	77
KPS10-3R3	3.3	2.50	3.80	8.3	65
KPS10-5	5.0	2.00	2.80	10.0	70
KPS10-12	12.0	0.84	1.20	10.1	75
KPS10-15	15.0	0.67	1.00	10.1	75
KPS10-24	24.0	0.42	0.65	10.1	78
KPS15-3R3	3.3	3.00	4.50	9.9	70
KPS15-5	5.0	3.00	4.50	15.0	73
KPS15-12	12.0	1.25	1.80	15.0	80
KPS15-15	15.0	1.00	1.50	15.0	80
KPS15-24	24.0	0.63	0.95	15.1	82


Note 3: Average not to exceed max power, <30s, 10% duty cycle

DERATING CURVE FOR KPS SERIES

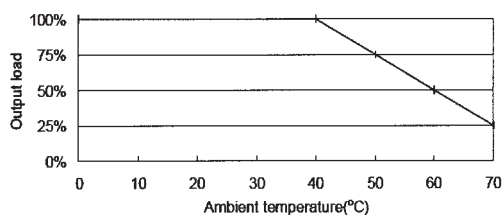


INTERMEDIATE VOLTAGES
AVAILABLE
PLEASE CONSULT SALES

KPS5 Outline Drawing

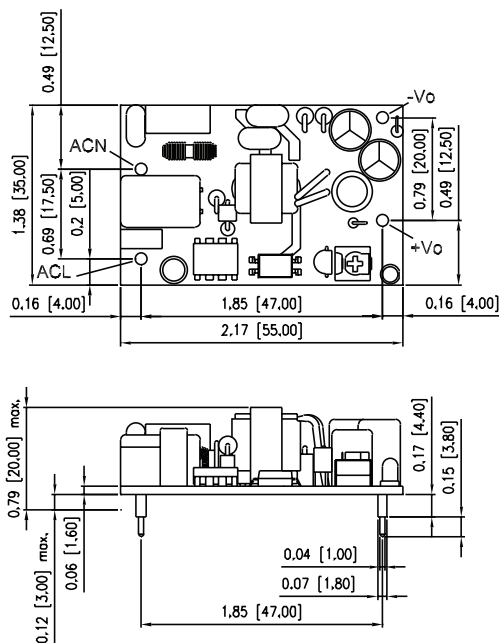


All Dimensions are in inches[mm]
Tolerances: XX±.02[X±.5] unless otherwise noted

KPS10 Outline Drawing

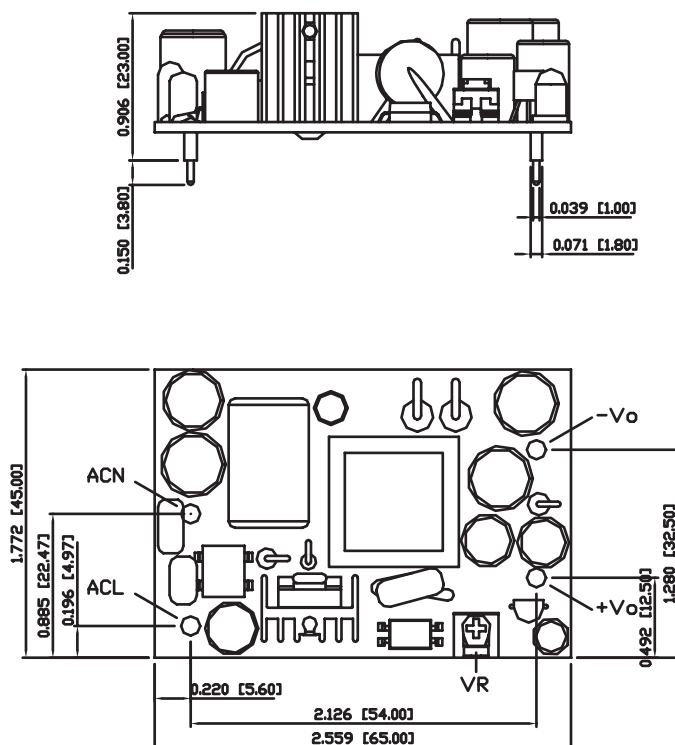

KPS15 Outline Drawing

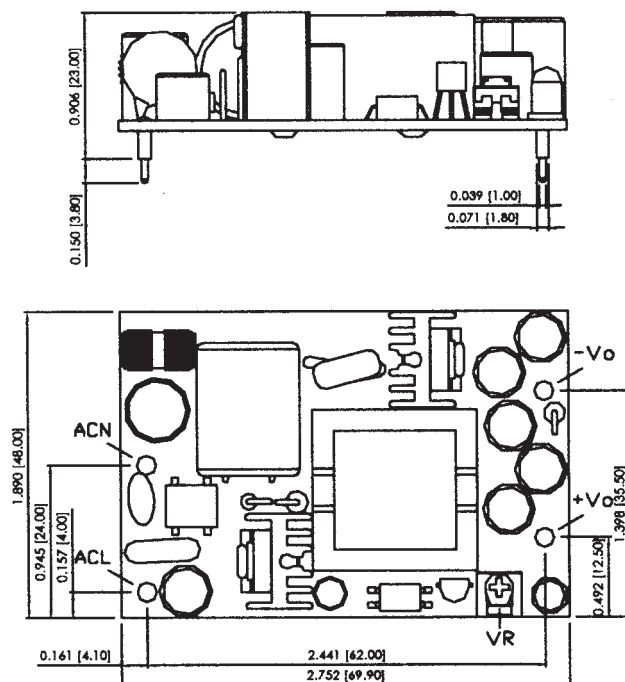

LAMBDA EMEA

AUSTRIA

LAMBDA ELECTRONICS GmbH
Aredstraße 22
A-2544 Leobersdorf

Telephone: +43 (0) 2256 655 84
Facsimile: +43 (0) 2256 645 12
www.lambda-austria.com

FRANCE

LAMBDA SAS
ZAC des Delaches, BP1077 - Gometz le Chatel
91940 Les Ulis

Telephone: +33 (0) 1 60 12 71 65
Facsimile: +33 (0) 1 60 12 71 66
Web: www.lambda-f.com

GERMANY

LAMBDA GmbH
Karl-Bold-Straße 40
D-77855 Achern

Telephone: +49 (0) 78 41 666 0
Facsimile: +49 (0) 78 41 5000
Web: www.lambda-germany.com

ISRAEL

NEMIC LAMBDA LTD
Kibbutz Givat
Hashlosa 48800

Telephone: +972 (0) 3 902 4333
Facsimile: +972 (0) 3 902 4777
Web: www.nemic.co.il

ITALY

LAMBDA s.r.l.
Via dei Lavoratori 128/130,
20092, Cinisello Balsamo (Mi)

Telephone: +39 (0) 02 61 29 38 63
Facsimile: +39 (0) 02 61 29 09 00
Web: www.lambda-italy.com

SWEDEN

LAMBDA SCANDINAVIA
PO Box 546, Rallarvägen 41
SE-184 25. Akersberga

Telephone: +46 (0) 8 598 94 090
Facsimile: +46 (0) 8 540 66 096
Web: www.lambda-scandinavia.com

UK

LAMBDA UK
Kingsley Avenue
Ilfracombe Devon EX34 8ES

Telephone: +44 (0) 1271 856666
Facsimile: +44 (0) 1271 864894
Web: www.lambda-gb.com

LAMBDA NORTH AMERICA

visit www.lambdapower.com for a list of Lambda offices and distributors

LAMBDA ASIA

visit www.densei-lambda.com for a list of Lambda offices and distributors

LOCAL DISTRIBUTION