

## DNR120-960TS Series



- Three Phase Input
- Up to 92% Efficiency
- Wide Adjustment Range
- Full Power -40 °C to +60 °C
- Rugged Design for Industrial Applications
- Single Phase Input Operation (340-575 VAC)
- 3 Year Warranty

## Specification

## Input

Input Voltage	<ul style="list-style-type: none"> <li>• 340-575 VAC 3 phase (single phase operation with 75% of rated output), 480-820 VDC</li> </ul>
Input Frequency	<ul style="list-style-type: none"> <li>• 47-63 Hz</li> </ul>
Input Current	<ul style="list-style-type: none"> <li>• DNR120TS: 0.35 A at 500 VAC</li> <li>• DNR240TS: 0.70 A at 500 VAC</li> <li>• DNR480TS: 1.00 A at 500 VAC</li> <li>• DNR960TS: 1.60 A at 500 VAC</li> </ul>
Inrush Current	<ul style="list-style-type: none"> <li>• 120 W 15 A typical at 500 VAC, cold start</li> <li>• 240 W 20 A typical at 500 VAC, cold start</li> <li>• 480 W 29 A typical at 500 VAC, cold start</li> <li>• 960 W 30 A typical at 500 VAC, cold start</li> </ul>
Power Factor	<ul style="list-style-type: none"> <li>• 0.6 at 500 VAC input and nominal load</li> </ul>
Earth Leakage Current	<ul style="list-style-type: none"> <li>• 0.32 mA</li> </ul>
Input Protection	<ul style="list-style-type: none"> <li>• 3 internal fuses, 2 A, 600 VAC (DNR120TS)</li> <li>• T3.15 A, 500 VAC (DNR240TS, DNR480 TS)</li> <li>• 5 A, 600 VAC (DNR960TS)</li> </ul>

## Output

Output Voltage	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Output Voltage Trim	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Initial Set Accuracy	<ul style="list-style-type: none"> <li>• ±1%</li> </ul>
Minimum Load	<ul style="list-style-type: none"> <li>• No minimum load required</li> </ul>
Start Up Delay	<ul style="list-style-type: none"> <li>• &lt;1000 ms (may increase at low temperature extremes)</li> </ul>
Start Up Rise Time	<ul style="list-style-type: none"> <li>• &lt;150 ms</li> </ul>
Hold Up Time	<ul style="list-style-type: none"> <li>• 20 ms min at 400 VAC</li> </ul>
Line Regulation	<ul style="list-style-type: none"> <li>• ±1%</li> </ul>
Load Regulation	<ul style="list-style-type: none"> <li>• ±1% max (±5% for units in parallel)</li> </ul>
Transient Response	<ul style="list-style-type: none"> <li>• 4% max deviation recovering to within 1% in 1 ms for 50% load change</li> </ul>
Ripple & Noise	<ul style="list-style-type: none"> <li>• 100 mV pk-pk 20 MHz bandwidth (may increase at low temperature extremes)</li> </ul>
Overvoltage Protection	<ul style="list-style-type: none"> <li>• 120-145%, recycle input to reset,</li> </ul>
Overload Protection	<ul style="list-style-type: none"> <li>• 110%-140%, constant current, auto recovery</li> </ul>
Temperature Coefficient	<ul style="list-style-type: none"> <li>• ±0.02%/°C</li> </ul>
Short Circuit Protection	<ul style="list-style-type: none"> <li>• Continuous trip and restart (Hiccup Mode) Power limited (DNR480TS)</li> </ul>
Parallel Operation	<ul style="list-style-type: none"> <li>• 2 units can be connected in parallel, DNR240TS, DNR480TS and DNR960TS only, total output derates by 10%, use Ishare connection for DNR960TS.</li> <li>Redundancy module DPM10 available for load currents up to 10 A, contact sales</li> </ul>

## General

Efficiency	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Isolation	<ul style="list-style-type: none"> <li>• 3000 VAC Input to Output</li> <li>• 1500 VAC Input to Ground</li> <li>• 500 VAC Output to Ground</li> </ul>
Switching Frequency	<ul style="list-style-type: none"> <li>• DNR120TS: 65 kHz typical</li> <li>• DNR240TS/960TS: 25 kHz typical</li> <li>• DNR480TS: 70 kHz typical</li> </ul>
Signals	<ul style="list-style-type: none"> <li>• DC ON indicator LED Green, DC LOW indicator LED Red</li> <li>• DC OK: normally open relay on 24 V models</li> </ul>
MTBF	<ul style="list-style-type: none"> <li>• DNR120TS: 560 kHrs, 240TS: 485 kHrs</li> <li>• 480TS: 400 kHrs, 960TS: 350 kHrs to Bellcore Issue 6, at +40 °C, GB</li> </ul>
DIN Rail	<ul style="list-style-type: none"> <li>• Compatible with TS35/7.5 or TS35/15</li> </ul>

## Environmental

Operating Temperature	<ul style="list-style-type: none"> <li>• -40 °C to 70 °C (DNR480TS -30 °C), derate linearly from 60 °C at 2.5%/°C (3.5%/°C for DNR960TS) (see derating curves)</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>• Convection-cooled with 25 mm free space all sides</li> </ul>
Operating Humidity	<ul style="list-style-type: none"> <li>• 20-95% RH, non-condensing</li> </ul>
Storage Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +85 °C</li> </ul>
Shock	<ul style="list-style-type: none"> <li>• 4 g peak, 22 ms on X, Y and Z axis</li> </ul>
Vibration	<ul style="list-style-type: none"> <li>• 10 to 500 Hz, 1 g rms on X, Y and Z axis</li> </ul>

## EMC &amp; Safety

Emissions	<ul style="list-style-type: none"> <li>• EN55022, class B conducted &amp; radiated</li> </ul>
Harmonic Currents	<ul style="list-style-type: none"> <li>• EN61000-3-2, class A</li> </ul>
Voltage Flicker	<ul style="list-style-type: none"> <li>• EN61000-3-3</li> </ul>
ESD Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-2, level 4 perf criteria A</li> </ul>
Radiated Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-3, level 3 perf criteria A</li> </ul>
EFT/Burst	<ul style="list-style-type: none"> <li>• EN61000-4-4, level 4 perf criteria A</li> </ul>
Surge	<ul style="list-style-type: none"> <li>• EN61000-4-5, level 4 perf criteria A</li> </ul>
Conducted Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-6, level 3 perf criteria A</li> </ul>
Magnetic Field	<ul style="list-style-type: none"> <li>• EN61000-4-8, level 4 perf criteria A</li> </ul>
Dips & Interruptions	<ul style="list-style-type: none"> <li>• EN61000-4-11, 30% 500 ms, 60% 200 ms, &gt;95% 5000 ms Perf Criteria A, A, A</li> </ul>
Safety Approvals	<ul style="list-style-type: none"> <li>• EN60950-1 UL508 UL60950-1 Pollution Degree 2, UL60950-1 Overvoltage Category II UL508 Overvoltage Category III, ANSI/ISA 12.12.01 Class 1, Division 2, Groups A,B,C and D</li> </ul>

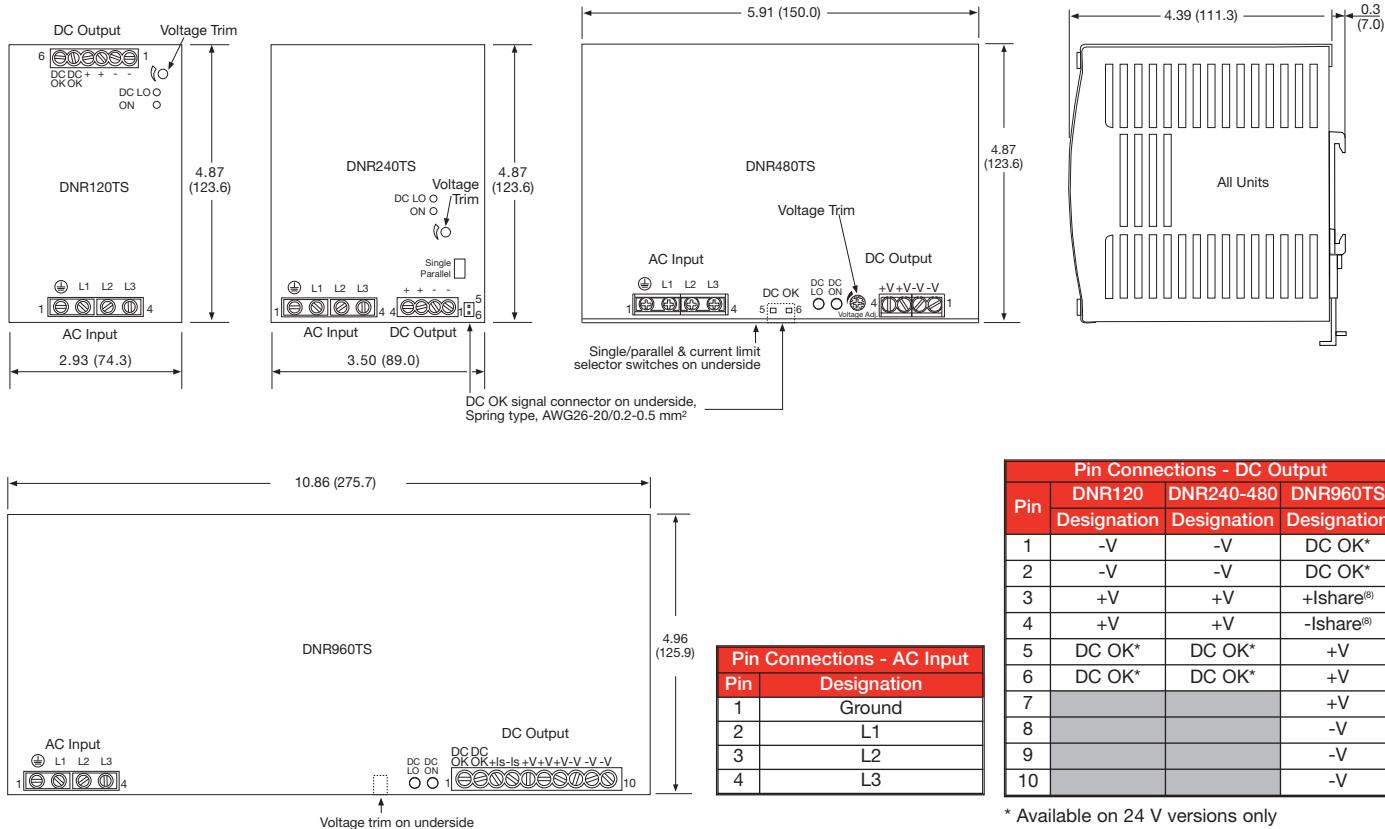
**Models and Ratings**

Output Voltage	Output Voltage Trim	Output Current <sup>(1)</sup>	Typical Efficiency	Model Number
12 V	11.4-14.5 V	10.0 A	87%	DNR120TS12†
24 V	22.5-28.5 V	5.0 A	88%	DNR120TS24†
24 V	22.5-28.5 V	10.0 A	87%	DNR240TS24-IT†
48 V	47.0-56.0 V	5.0 A	88%	DNR240TS48-IT†
24 V	22.5-28.5 V	20.0 A	88%	DNR480TS24-IT†
48 V	47.0-56.0 V	10.0 A	89%	DNR480TS48-IT†
24 V	22.5-28.5 V	40.0 A	92%	DNR960TS24-IT
48 V	47.0-56.0 V	20.0 A	91%	DNR960TS48-IT†

**Notes**

1. Reduce by 25% for single phase input operation, (340-575 VAC).

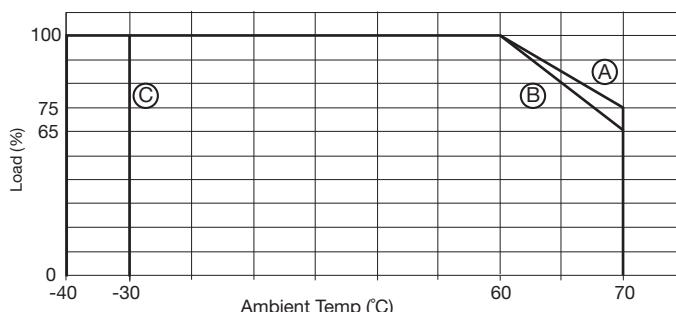
† Available from Farnell. See pages 266-269.

**Mechanical Details**

\* Available on 24 V versions only

**Notes**

- All dimensions in inches (mm).
- Tolerance: ±0.02 (0.5) maximum.
- Weight - DNR120TS: 1.76 lb (800 g) approx.  
DNR240TS: 2.43 lb (1100 g) approx.  
DNR480TS: 4.23 lb (1920 g) approx.  
DNR960TS: 7.05 lb (3200 g) approx.
- Screw terminal: 10-24 AWG cable size.
- DC OK Relay 60 VDC at 300 mA.
- Allow 0.98" (25 mm) clearance all round to ensure adequate ventilation.
- Connection screw maximum torque: Input: 9 lbs-in (1.0 Nm), Output: 5.5 lbs-in (0.6 Nm).
- Connecting +Ishare and -Ishare between two power supplies will force the current to share.

**Derating Curves**

Ⓐ DNR120-240TS

Ⓑ DNR960TS

Ⓒ DNR480TS