


E CORES

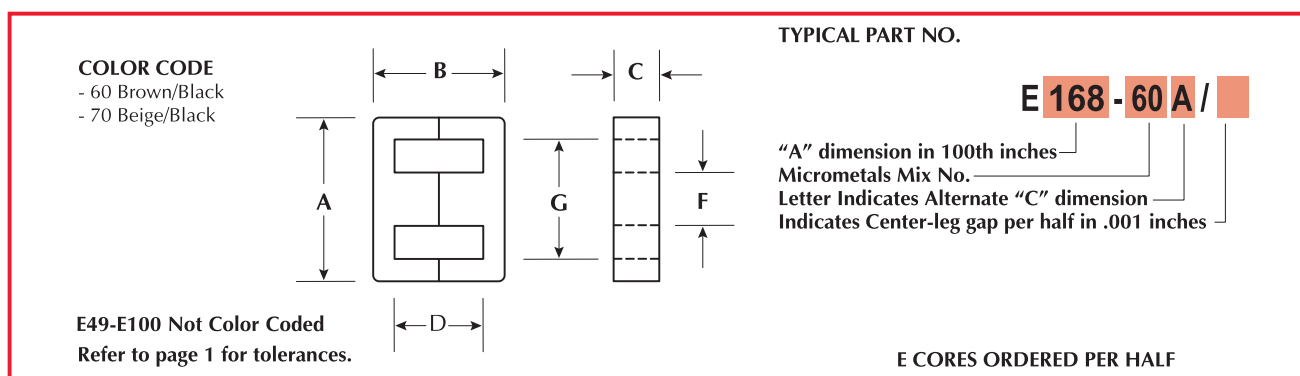

MICROMETALS Part No.nH/N ² (BOBBIN)	A _L A (REF. SIZE)	B in/mm	C in/mm	D in/mm	F in/mm	G in/mm	ℓ in/mm	MAGNETIC DIMENSIONS			
								A cm	V cm ²	W cm ³	cm ²
E49-60 E49-70 (PB49)	29.0 45.0 (US LAM: EE-28-29)	.500/12.7	.437/11.1	.125/3.18	.312/7.93	.125/3.18	.375/9.53	2.86	.101	.288	.252
E75-60 E75-70 (PB75)	44.0 72.0 (US LAM: EI-187)	.750/19.1	.635/16.1	.187/4.75	.455/11.6	.187/4.75	.562/14.3	4.20	.226	.936	.551
E100-60 E100-70 (PB100E)	65.0 110.0 (US LAM: EE-24-25)	1.000/25.4	.750/19.1	.250/6.35	.500/12.7	.250/6.35	.750/19.1	5.08	.403	2.05	.806
E137-60 E137-70 (PB137)	100.0 165.0 (US LAM: EI-375)	1.375/34.9	1.145/29.1	.375/9.53	.770/19.6	.375/9.53	1.000/25.4	7.40	.907	6.72	1.55
E162-60 E162-70 (PB162)	149.0 250.0 (US LAM: EI-21)	1.625/41.3	1.342/34.1	.500/12.7	.842/21.4	.500/12.7	1.125/28.6	8.41	1.61	13.6	1.70
E168-60 E168-70 (PB168)	135.0 225.0 (DIN: 42/15)	1.685/42.8	1.660/42.2	.590/15.0	1.210/30.7	.475/12.0	1.210/30.7	10.4	1.81	18.5	2.87
E168-60A E168-70A (PB168A)	170.0 285.0 (DIN: 42/20)	1.685/42.8	1.660/42.2	.787/20.0	1.210/30.7	.475/12.0	1.210/30.7	10.4	2.41	24.6	2.87
E220-60 (PB220)	196.0 (DIN: 55/21)	2.210/56.1	2.180/55.4	.820/20.8	1.510/38.3	.680/17.3	1.520/38.6	13.2	3.60	47.7	4.09
E305-60 (PB305 or PB305/V0)	222.0	3.051/77.5	3.051/77.5	.933/23.7	2.118/53.8	.933/23.7	2.118/53.8	18.5	5.62	104	8.10
E305-60A (PB305A or PB305A/V0)	280.0	3.051/77.5	3.051/77.5	1.244/31.6	2.118/53.8	.933/23.7	2.118/53.8	18.5	7.49	139	8.10
E450-60 (PB450/V0)	400.0 (US LAM: EI-30)	4.500/114	3.636/92.4	1.375/34.9	2.250/57.2	1.375/34.9	3.120/79.3	22.9	12.2	280	12.7

TEL: (714) 970-9400
 FAX (714) 970-0400

MICROMETALS